

UPRIGHT REFRIGERATED CABINETS **GLAZED**



www.rapa.pl/en


RAPA sp. j.
9 Ceramiczna Street
20-149 Lublin, Poland

+48 81 718 46 51
rapa@rapa.lublin.pl

①



②

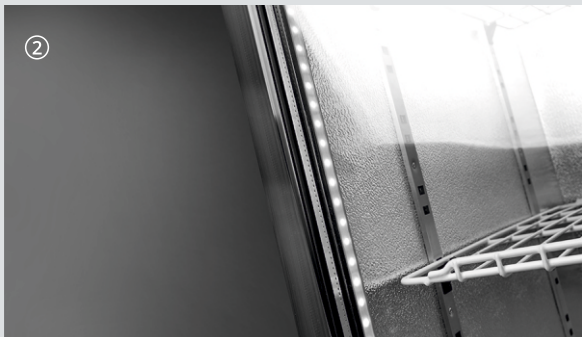


③




④



⑤

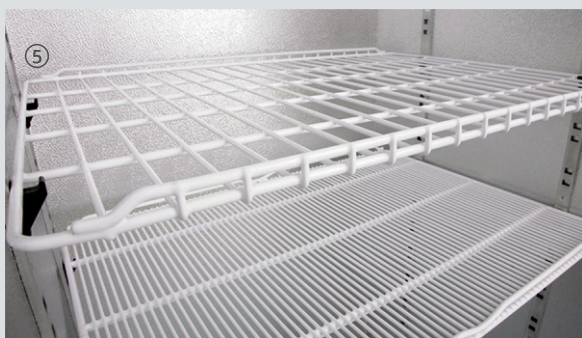

⑥

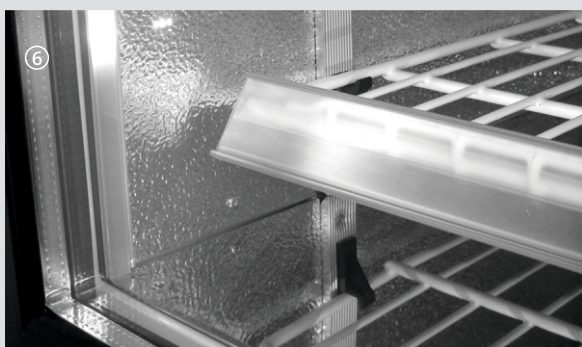

The RAPA company offers **one-side and two-side glazed upright refrigerated cabinets**, perfect to display products properly, while maintaining the best cooling. They are designed to display cakes, deli products and drinks. Due to the dynamic cooling system, the temperature is evenly distributed throughout the chamber. In addition, the use of dense grid shelves (available as an accessory) allows for convenient positioning of bottles that will not tip over.

Devices with top and bottom mounted unit are available in single-chamber and double-chamber versions hinged doors with the possibility of dividing the door horizontally. The offer also includes versions with sliding doors (double-chamber).

The devices are designed to work in the **3rd/4th climatic class**, in maximum ambient temperatures **25°C/30°C**.

STANDARD EQUIPMENT

Refrigerating unit

- 3rd or 4th climatic class
- Plug-in unit powered with ecological R-290 refrigerant - bottom or top mounted unit depending on the model
- Gravitational cooling or fan assisted cooling
- Electronic temperature controller with display on the service side
- Condensate drain into defrost water collection container in all cabinets with bottom mounted unit and cabinets with top mounted unit and fans
- Automatic condensate evaporation system – for all top mounted unit cabinets and SR/WH model

Housing

- **One-side glazed upright refrigerated cabinets:** hinged door or sliding door. There is possibility to divide the hinged door horizontally
- **Two-sides glazed upright refrigerated cabinets:** hinged door or glazed sliding door
- Housing painted in RAL 9003 Signal white colour (standard) or other colour chosen from the RAPA colour chart (SR/WH model and *ecoline* series) ①
- Vent lockable with magnet
- Legs masking in the housing colour - models with permanently fixed glass pane on the customer side and all AG models
- Reversible door in single-chamber devices or montage of divided door on the chosen side in double-chamber devices
- Adjustable legs
- Backlighted top plafond in cabinets with top mounted unit
- Standard widths of single-chamber cabinets: 625, 725, 825 mm, of double-chamber cabinets; 1200, 1400, 1600 mm
- All panes made of combined, double tempered glass (low-E) ②
- Lock for sliding door (from the service side) - 2S2R model

Interior

- Bottom of the storage chamber made of "mirror" stainless steel
- LED lighting ③

Shelves

- Set of plasticized, standard shelves along with supports: 5 pcs. in single-chamber cabinet, 10 pcs. in double-chamber cabinet

ADDITIONAL EQUIPMENT

Refrigerating unit

- Automatic condensate evaporation system - for devices with bottom mounted unit
- Device without aggregate
- Fan – dynamic cooling
- Evaporator protected with a preservative coating

Housing

- Set of 4 wheels with regulated foot
- Painting of housing in individual RAL colour chosen by customer
- Painting of housing in colour from the RAPA colour chart
- Housing made of stainless steel (NZ)
- Adjustable legs made of stainless steel
- Self-closing system of hinged door
- Open door sound alarm
- Lock for hinged or sliding door ④

Interior

- Bar for hooks
- Interior made of „mirror“ stainless steel
- Glazed double-chamber upright cabinet for 21 pcs. of EURO 2 containers (w: 60 cm, d: 40 cm, h: 20 cm) - applicable to 1600/AG cabinets
- Basis for EURO 2 containers - applicable to cabinets of the width of 825 mm and 1600 mm
- Interior of double-chamber upright cabinet without partition
- Reinforced bottom in device chamber

Shelves

- Plasticized dense shelves, acid-resistant shelves: standard or dense ⑤

ACCESSORIES

- Pollen filter
- Shelf edge strip ⑥
- Perforated pad to be applied on shelf - made of grinded stainless steel
- Plasticized shelf: standard or dense; acid-resistant shelf: standard or dense
- USB temperature recorder
- Support for shelf

Devices codes meaning visible on the next page

SCh – upright refrigerated cabinet, **S** – one side glazed upright refrigerated cabinets – hinged door, **SR** – one side glazed upright refrigerated cabinets – sliding door, **2S** – two sides glazed upright refrigerated cabinets – hinged door on the service side, hinged door with blockade on the customer side, **2S/1D** – two sides glazed, hinged door on the service side, permanently fixed glass pane on the customer side, **2SR** – two sides glazed, sliding door on the service side, hinged door with blockade on the customer side, **2SR/1D** – two sides glazed, sliding door on the service side, permanently fixed glass panes on the customer side, **2S2R** – two sides glazed, sliding door on both sides, **2D** – single-chamber two-door, **3D** – double-chamber three-door, **W** – with fan, **AG** – top mounted unit, **AD** – bottom mounted unit, **3 cl** – 3rd climatic class, **4 cl** – 4th climatic class, **WH** - increased capacity, higher with a fan

ONE SIDE GLAZED CABINETS WITH BOTTOM MOUNTED UNIT



S model
R-290/ *ecoline* /standard



S model
R-290/ *ecoline* /standard



SR model
R-290/ *ecoline* /standard



S/2D model
R-290/ *ecoline* /standard



S/3D model
R-290/ *ecoline* /standard



SR/WH model
R-290/standard

TWO SIDES GLAZED CABINETS WITH BOTTOM MOUNTED UNIT



2S model
R-290/ *ecoline* /standard



2S model
R-290/ *ecoline* /standard



2S2R model
R-290/ *ecoline* /standard



2S/1D model
R-290/ *ecoline* /standard



2SR/1D; 2S/1D model
R-290/ *ecoline* /standard



2SR model
R-290/ *ecoline* /standard

ONE SIDE GLAZED CABINETS WITH TOP MOUNTED UNIT



S/AG model
R-290/ *ecoline* /standard



S/AG model
R-290/ *ecoline* /standard



SR/AG model
R-290/ *ecoline* /standard

TWO SIDES GLAZED CABINETS WITH TOP MOUNTED UNIT



2S/AG/1D model
R-290/ *ecoline* /standard



2S/AG/1D model
R-290/ *ecoline* /standard



2SR/AG/1D model
R-290/ *ecoline* /standard



S/AG/2D model
R-290/ *ecoline* /standard



S/AG/3D model
R-290/ *ecoline* /standard

SAMPLE FINISH OF SR/AG MODEL - blue / RAL 5002



MODELS WITH FAN

- selected models are possible to be equipped with fan assisted cooling system:
 - S** single-chamber / double-chamber AD 3 cl., 4 cl. / AG 3 cl., 4 cl.
 - SR** double-chamber AD 3 cl., 4 cl. / AG 3 cl., 4 cl.
 - 2S** single-chamber AD 3 cl., 4 cl. double-chamber AD 3 cl.
 - 2S/1D** single-chamber / double-chamber AD 3 cl., 4 cl. / single-chamber AG 3 cl., 4 cl. double-chamber AG 3 cl.
 - 2SR** AD 3 cl. double-chamber ,
 - 2SR/1D** AD 3 cl., 4 cl / AG 3 cl. double-chamber
 - 2S2R** AD 3 cl. double-chamber
- SR/WH** model has a dynamic cooling system as standard

STANDARD MODELS

- Housing painted in white colour from the RAPA colour chart

***ecoline* SERIES MODELS AND 1D MODELS**

- Housing painted in colour chosen from the RAPA colour chart

