


Multideck refrigerated displays

POS-A

POS - impulse sales (Point Of Sale),
POS line, A model

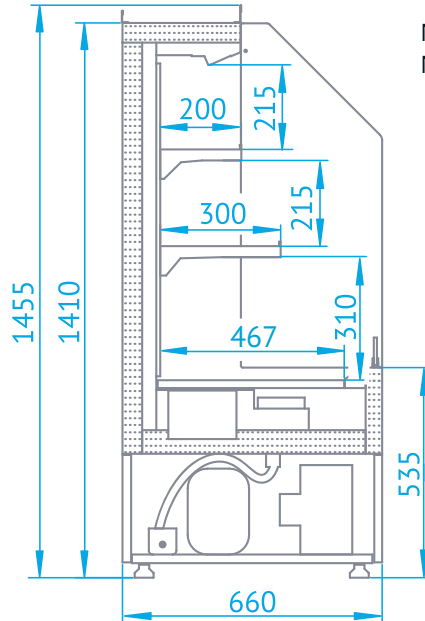

Net price POS-A 725: **1 090 EUR**

Net price POS-A 925: **1 125 EUR**



Dimensions [cm]

| model display POS | A 725 | A 925 |
|---|-------|-------|
| width | 72,5 | 92,5 |
| depth | 66 | 66 |
| height | 145,5 | 145,5 |
| refrigerated exposition space [m ²] | 0,62 | 0,81 |
| non-refrigerated exposition space [m ²] | 0,21 | 0,27 |

Parameters

| | |
|---------------------------|------------------------------------|
| climatic class | 3 |
| temperatures range | +2°C ÷ +10°C |
| refrigerant (HC) | R-290 |
| rated voltage | 230V~ / 50 Hz |
| rated power | POS-A 725 750 W POS-A 925 800 W |
| defrosting | automatic |
| evaporation of condensate | automatic |

Colours

| | |
|---------|----------|
| housing | Standard |
| | |

Standard equipment

Refrigeration unit

- 3rd climatic class
- Plug-in unit powered with ecological R-290 refrigerant
- Fan assisted cooling
- Electronic temperature controller with display, setting range: +1°C ÷ +13°C
- Automatic condensate evaporation

Housing

- Sides of tempered glass
- Housing painted in colour RAL 7021 matt or in colour chosen from the RAPA colour chart
- Vent lockable with magnet
- Adjustable legs
- Main internal frame in refrigerating area made of stainless steel

Exposition

- Supports of stainless steel
- Set of shelves in the colour of housing with shelf edge strips
- Non-refrigerated exposition space on top
- LED light - cold white (CW)
- Exposition interior in the colour of housing

Additional equipment

Refrigeration unit

- Protection of the evaporator with a preservative coating

Housing and exposition

- Painting of device in individual RAL colour chosen by customer

Accessories

- Pollen filter
- Shelf edge strip

